

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

The undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents originally filed in connection with patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration, save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or P.L.C.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed



Dated 22 May 2007



2833 IFW

PTO/SB/21 (04-07)

Approved for use through 09/30/2007. OMB 0651-0031

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Project (PTO/SB/01-1995), no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>TRANSMITTAL FORM</b>  <i>(to be used for all correspondence after initial filing)</i>	Application Number	10/056,000
	Filing Date	January 28, 2002
	First Named Inventor	James COLEMAN
	Art Unit	2833
	Examiner Name	V. W. Miska
Total Number of Pages in This Submission	Attorney Docket Number	532412000100

ENCLOSURES (Check all that apply)		
<input type="checkbox"/> Fee Transmittal Form <input type="checkbox"/> Fee Attached <input type="checkbox"/> Amendment/Reply <input type="checkbox"/> After Final <input type="checkbox"/> Affidavits/declaration(s) <input type="checkbox"/> Extension of Time Request <input type="checkbox"/> Express Abandonment Request <input type="checkbox"/> Information Disclosure Statement <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) <input type="checkbox"/> Reply to Missing Parts/Incomplete Application <input type="checkbox"/> Reply to Missing Parts under 37 CFR 1.52 or 1.53	<input type="checkbox"/> Drawing(s) <input type="checkbox"/> Licensing-related Papers <input type="checkbox"/> Petition <input type="checkbox"/> Petition to Convert to a Provisional Application <input type="checkbox"/> Power of Attorney, Revocation Change of Correspondence Address <input type="checkbox"/> Terminal Disclaimer <input type="checkbox"/> Request for Refund <input type="checkbox"/> CD, Number of CD(s) _____ <input type="checkbox"/> Landscape Table on CD	<input type="checkbox"/> After Allowance Communication to TC <input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences <input type="checkbox"/> Appeal Communication to TC (Appeal Notice, Brief, Reply Brief) <input type="checkbox"/> Proprietary Information <input type="checkbox"/> Status Letter <input checked="" type="checkbox"/> Other Enclosure(s) (please identify below): Return Receipt Postcard Claim for Priority and Submission of Document Supplemental Declaration
<div>Remarks</div>		

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT			
Firm Name	MORRISON & FOERSTER LLP		
Signature			
Printed name	Barry E. Bretschneider		
Date	June 1, 2007	Reg. No.	28,055



Docket No.: 532412000100  
(PATENT)

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Patent Application of:  
James COLEMAN

Application No.: 10/056,000

Confirmation No.: 2103

Filed: January 28, 2002

Art Unit: 2833

For: WATER FEATURE

Examiner: V. W. Miska

**CLAIM FOR PRIORITY AND SUBMISSION OF DOCUMENT**

MS Issue Fee  
Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Sir:

Applicant hereby claims priority under 35 U.S.C. 119 based on the following prior foreign application filed in the following foreign country on the date indicated:

<u>Country</u>	<u>Application No.</u>	<u>Date</u>
GB	0129314.1	7 December 2001

In support of this claim, a certified copy of the said original foreign application is filed herewith.

Dated: June 1, 2007

Respectfully submitted,


By

Barry E. Bretschneider

Registration No.: 28,055  
MORRISON & FOERSTER LLP  
1650 Tysons Blvd, Suite 400  
McLean, Virginia 22102  
(703) 760-7743

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

JAMES COLEMAN

2. Patent application number

(The Patent Office will fill in this part)

0129314.1

07 DEC 2001

3. Full name, address and postcode of the or of each applicant (underline all surnames)

JAMES COLEMAN  
JAMES DESIGNS  
THE OLD TANNERY  
KELSTON  
BATH UK BA1 9AN

8075841001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

WATER FEATURE

5. Name of your agent (if you have one)

N/A.

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

JAMES DESIGNS  
THE OLD TANNERY  
KELSTON  
BATH BA1 9AN.

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing

(day / month / year)

UK.

GB0102723.7

3 16 FEB 2001

UK

GB 0123949.0

5 OCT 2001

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing

(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or x

b) there is an inventor who is not named as an applicant, or x

c) any named applicant is a corporate body. x NO.

See note (d))

CNC

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

TWO SETS

Continuation sheets of this form

0

Description

17

Claim(s)

5

Abstract

1

Drawing(s)

11 + 11

10. If you are also filing any of the following, state how many against each item.

Priority documents

—

Translations of priority documents

—

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

—

Request for preliminary examination and search (Patents Form 9/77)

✓ 1 ✓

Request for substantive examination (Patents Form 10/77)

1 ✓

Any other documents (please specify)

X

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

6th. 12. 01

12. Name and daytime telephone number of person to contact in the United Kingdom

JAMES COLEMAN 017 9020200

#### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

#### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## WATER FEATURE

The present invention relates to a water feature, specifically to an ornamental water feature. Particularly, but not exclusively, the invention relates to a water feature whose appearance gives an indication of the time.

Displays exist where a fixed volume of water in a tube is stirred by a paddle-wheel at the bottom. A vortex shape will form and a partial air column (a free surface) will be drawn down from the top. Other fixed-volume displays exist where a pump is used to draw water out of the bottom of a tube and where it is reintroduced on the tangent, either at the top or bottom of the tube. These systems create a vortex but suffer from the disadvantage that, with a sufficient flowrate, the air column which is drawn down from the top surface of the water can achieve an uninterrupted path into the inlet of the pump. This air entrainment into the pump can cause cavitation and the air that passes through the pump is passed back to the tube with the water. This causes an emulsion of bubbles and cloudiness which detracts very much from the display that is achieved. Re-introducing the water at the top of the column reduces this air bubble problem, but requires a supply pipe up the side of the water feature which also detracts from the appearance of the display.

It is an object of this invention to provide a water feature which overcomes the problems of the prior art.

The invention provides a water feature comprising a vessel containing a volume of water and means for imparting rotational motion thereto, wherein means are also provided for varying the height of the volume of water in the vessel. The invention also provides a method of operating a water feature comprising at least one vessel containing a volume of water, comprising the steps of causing the or a volume of water to rotate about an axis thereof so as to form a vortex therein and causing the rotating volume of water to vary in height over time. Advantageous features are set out in the subsidiary claims.

This invention recognises that an advantageous step for the pumped system is to use a separate sump of water. The pump is then able to draw non-aerated water from the sump and to discharge it tangentially into the vessel containing the vortex (preferably at the bottom). The drain flow, which can be a mixture of air and water, flows through

pipework back to the sump. By means of a deflector, as the water flows into the sump, the air escapes (through buoyancy) and is not drawn into the pump inlet, which is positioned low down below the surface of the water in the sump.

Unlike in the fixed-volume arrangements, the sump brings the advantage of the variable volume system — one in which the height of the vortex can be altered by changing either the pumping rate and/or the drain rate.

The bottom arrangement of the vessel containing a vortex is mostly dictated by the plumbing requirements of the water flows.

The arrangement at the top of the vessel is not otherwise defined and it can take a number of forms. An obvious arrangement is for the top of the vessel to be open to the atmosphere, thereby allowing air to be expelled or drawn back in as the water level in the vessel is varied. A dust cover is a useful addition and it also reduces the gurgling sound that occurs with the two-phase flow drain. With an open top, the water level could be increased to such an extent that it flows out over the top of the vessel. Some applications would make use of and benefit from this effect, others definitely would not.

In this invention, the vortex is generated and maintained by pumping water tangentially into the bottom of the vessel and by simultaneously allowing the water to flow out of a drain located in the middle and at the bottom of the vessel. If the amount of water flowing into the vessel exceeds the amount flowing out, then the fill level of the vessel (and the height of the vortex) will increase with time. If the amount of water flowing into the vessel is less than that flowing out, then the height of the vortex will decrease with time. If the two flows are matched, then the vortex height will remain constant.

The vortex that forms has the characteristic profile of a free vortex, with an air column in the central region. The exact definition or shape of the vortex is not critically important in the context of this invention.

Therefore, in this invention, as the input pump rate and or the output drain rate are varied, then so too will the height of the contained vortex vary. The presence and extent of the air column that forms is dependent upon both the swirling motion set up by the water flow from the tangential inlet and the flow out through the central drain. If at any time the central drain is closed off, then the extent of the air column will reduce. It could

reduce to nothing. With sufficient flow through the central drain, the air column will be drawn down beyond the bottom of the vessel into the pipework connected to the drain.

The positioning of the inlet and outlets are not critical to the formation of the vortex and are not material to the present invention. Indeed, the central drain can even be slightly displaced from the axis of the vessel and the inlet and outlet can be displaced upwards from the bottom of the vessel.

Similarly, the size, the shape and the position of the water inlet or inlets and outlet or outlets can be tuned for an optimised effect, but these are not critical at least to the creation of the vortex effect. Optimised configurations also exist for the drain assembly after the inlet to the vessel drain and these are presented hereafter.

The invention of a contained variable height vortex of water can be applied to a number of different uses.

One of these is in a water clock and this is now described.

In one embodiment of the invention, the water vortex is generated in a circular tube and the level of the vortex is varied in height to indicate the minutes in an hour. One preferred design is to surround the tube containing the vortex with a second larger tube (a further vessel), thereby forming a coaxial annular space which can also contain water made to vary in height to indicate the hours within a twelve (or other) hour period.

The coaxial tubes contain two separate volumes of water, but they are within the same system and can share the same sump. The volumes of water bounded by the tubes can function independently. The inner tube containing the vortex fills over one hour. In one embodiment, the outer volume of water in the coaxial annular space fills over twelve hours. This filling can occur smoothly as a continuous process or it can, for example, be achieved in steps at the change of the hour. The water in the coaxial annular space can have a float on top. The inner tube empties on the hour. At twelve noon and twelve midnight, both tubes empty together. Lighting within the feature illuminates the water.

The method of filling and emptying the further vessel, which may be a circular tube as in the clock embodiment described above, is known. However, because both vessels are



part of one embodiment of the invention, the top detail of the further vessel is important and one configuration is explained in the example of the invention described hereafter.

To provide the water-height control required in the clock, pressure transmitters can be used to measure the hydrostatic pressure of the water in the two coaxial vessels.

These can be connected to an electronic control system which controls the pump or pumps so that the levels of water in the two vessels correspond to the desired minute and hourly readings.

If, in spite of a dust (and noise) cover, both vessels have an air passageway to the outside to allow venting, thereby avoiding their pressurisation or de-pressurisation, then the water-level control and overflow prevention has to be extremely accurate and reliable. In a clock, water overflow must be prevented under all circumstances. This imposes a significant cost.

Also, for aesthetic reasons, especially with a clock, it is best for the water to be able to reach the top of the vessels (or to become very close to the top), but it cannot do so with the vented top. This is because, if the control system went out of calibration or became unreliable, then the water could pour out over the top of the clock. Therefore, for practical reasons, it is necessary to leave a significant margin of error. This is not ideal and it also creates the possibility of condensation remaining on the parts of the vessels which are never wetted by water.

One aspect of the invention proposes that the top of the vessel containing the vortex can be sealed, making it air (and hence water and dust) tight. This then removes the chance of water escaping and leaking onto the floor. It means that air can no longer escape out of the top of the vessel as it is filled with water, or be drawn back through the top of the vessel as it is being emptied.

This invention also proposes that, typically in the clock, the coaxial annular space (outside of the vessel containing the vortex) can also be sealed at its top, but that it can be vented into the vessel containing the vortex. This will be explained hereafter.

With a sealed top, the air pressure equalisation on filling and emptying has to find another route to atmosphere. A feature of this invention is that the air can be vented through the central drain of the vortex.

First, consider only the vessel containing the vortex. If this has a sealed top, as the water enters the vessel, the air will either become pressurised or the excess air will need to be expelled. With the vortex flow described above, the generation of the air column in the middle of the drain allows the excess air pressure to be relieved through the drain.

On filling, the pump is on. The appropriately-sized drain will be open and the combination of the two cause an air core to exist. If the pump is turned off completely, the swirl in the water volume (which sustains the vortex) will reduce. If it reduces too far, the air column will not be maintained. In this case, the reduced pressure in the volume of air above the volume of water will greatly slow or stop the exit of water through the drain.

However, if the pump rate is not reduced too far, or the drain rate is increased during the emptying cycle, then there will be sufficient swirl to maintain the air column, but the water level will fall. Experiments, without optimisation work, show that a test volume of water can be emptied sufficiently quickly. Note that the fill cycle is much easier to achieve because the pump must be on and so the air column is stronger. It is on the emptying cycle that the pump flow and/or drain flow must be controlled to maintain the swirling vortex motion which allows the air venting to be maintained.

In a clock embodiment of the invention, the inner vessel can be contained within the further vessel which is then sealed at its top. If the inner vessel is empty, then the further vessel can vent through the drain of the inner vessel. And, as stated above, if the vortex flow in the inner vessel is properly controlled, then the further vessel can continue to vent during both filling and emptying.

Also, in a clock embodiment of the invention, the top of the inner vessel will be very close to, but just below, the inside of the top of the further vessel. It will be possible to fill both vessels to very close to the top. Either vessel could overflow into the other, but neither vessel would overflow outside of the system. The only vent is to the sump. This brings a further advantage because the air flow into and out of the vessel and further vessel can be filtered remotely via the remote sump. This together with properly conditioned, maintained and filtered water means that the vessel and further vessel may never need internal cleaning.

One variation would be to deliberately add air, at various times and especially on the emptying cycle, to the sealed-top system. This could be from an air pump connected to the manifold at the bottom of the vessels. Air would form as bubbles which could pass upwards through the flow in either the inner vessel or the further vessel or through both vessels. With the co-vented system, an air supply from the inner vessel could vent the further vessel. In some circumstances, an over pressure could be applied to increase the rate of emptying of either vessel. The additional air input may not be essential but it may also produce an attractive effect.

In a clock embodiment of the invention, if the outer volume of the clock is sealed at the top and is not vented to the inner volume, then it will not be possible to fill the outer volume with water without alternative means to allow the trapped air to be expelled. This problem could be solved by providing a one-way valve which would admit air as the outer volume empties.

In the embodiment of the clock, the use of a sealed top allows much less critical level sensing. Obviously it is important that the clock keeps time, but if an overfill situation occurred, it would not cause an escape of water.

In the embodiment of the clock, with the safety provided by the sealed top, it is possible to consider not using pressure transmitters to control the height of the two water columns. Overfill and overflow safety features are also not required. Without the feedback of pressure transmitters, the delivery of the pump or pumps needs to be calibrated and this can undertaken during commissioning and possibly also during routine maintenance.

The use of a centrifugal pump to control the inner vessel is the most practical. The further vessel can also be filled by a centrifugal pump or can be continuously filled by a dosing pump. One centrifugal pump, with a valve-operated flow cross-over system, can be shared between the two vessels. The type of pump or pumps selected will depend, but not exclusively, upon the display type required, the location of the pump or pumps, the shape of the further vessel and the design of the control system and its feed-back measuring system, if used. The use of two separate centrifugal pumps for the two water volumes allows for simple recovery after a power failure. Dosing pumps are generally noisy and may not be suitable if, for practical reasons, the pump needs to be

in 'ear shot' of the clock display. Different valve arrangements are required with centrifugal and dosing pumps.

The clock is one application of the invention. This technology can be applied to other water feature displays which make use of vortices. Whenever it is desired to generate a vortex in a vessel, the top can be sealed (with a fully transparent lid if desired) and the attractive visual effect can be achieved without the use of sophisticated and expensive level control systems. In a single vessel, the vortex can be taken to its very top. When this happens the appearance changes. Allowing the vessel or further vessel to fill to capacity, enables further switching determined by pressure and this enables the control to be set up to achieve a number of effects. None of this would be possible with a vented top.

The embodiments of the invention will now be described in detail with reference to the accompanying drawings wherein:-

Figure 1a is a schematic side sectional view of a water feature according to a first embodiment of the invention;

Figure 1b is a sectional view of the water feature of Figure 1a taken along the line B-B;

Figure 2 is an enlarged view of the lower portion of the embodiment of Figure 1a;

Figure 3 is an enlarged view of the upper portion of the embodiment of Figure 1a;

Figure 4 is a schematic side sectional view of a water feature according to a second embodiment of the invention;

Figure 5 is an enlarged view of the lower portion of the second embodiment shown in Figure 4;

Figure 6 is a schematic side sectional view of a water feature according to a third embodiment of the invention;

Figure 7 is an enlarged view of the lower portion of the third embodiment shown in Figure 6;

Figure 8 is a schematic side sectional view of a water feature according to a fourth embodiment of the invention;

Figures 9a thro 9i show various alternative forms of vessel and further vessel.

The first embodiment uses a centrifugal type pump for both the inner tube fill pump 8 and the outer tube fill pump 15. It is illustrated in Figures 1 to 3 and takes the form of a clock.

The main clock components are the manifold 1 connected and sealed to an outer tube 2, an inner tube 3 and a co-venting but outwardly sealed lid 4 which allows air to pass between the outer tube 2 and the inner tube 3. The manifold 1 has connections for an outer tube fill and drain port 5, an inner tube tangential fill port 6 and an inner tube drain port 7. Rigid or flexible conduits can be connected to these ports. Water which can be discharged through the inner tube tangential fill port 6 enters on the tangent to the inner wall of the inner tube 3. The inner tube drain port 7 is on the central axis of the inner tube 3. If water is pumped into the inner tube 3, through the inner tube tangential fill port 6 from an inner tube fill pump 8, which draws water from a sump 9 at a rate in excess of the flow out of the inner tube drain port 7, which is ducted back to the sump 9, then the level of water in the inner tube 3 will rise as a vortex of water 10 is formed. If the pumping rate is less than the drain rate, then the inner tube 3 will empty, if it has previously been filled, or will not fill up if it is already empty.

The basic rate of drain of the inner tube 3 is affected, and therefore set, by a controlling tube 11, set near to (and it could be within) and concentric with the inner tube drain port 7. To achieve a faster rate of drain, the inner tube drain bypass valve 14 can be opened. This allows a greater drain flowrate than can pass through the controlling tube 11, whilst leaving the flow (and air column) through the controlling tube 11 substantially undisturbed. Downstream of the controlling tube 11, the diameter of the secondary inner tube drain pipe 13 is increased to have a cross sectional area about 50% greater or more than the controlling tube 11. The diameter of the pipework supplying the inner tube drain bypass valve 14 can be approximately the diameter of the secondary inner tube drain pipe 13. The inner tube drain bypass valve 14 can be opened during the drain cycles.

The outer coaxial water column 20 is contained between the inner wall of the outer tube 2 and the outer wall of the inner tube 3. If outer tube fill pump 15 is on and valve 16 is open, then so long as the pump is able to deliver a head in excess of that created by water already above it, the outer coaxial water column 20 will increase in height. If the

filling, from outer tube fill pump 15, through the outer tube fill and drain port 5 is stopped and the outer tube drain valve 16 is open, then the volume of water will be enabled to drain through the outer tube fill and drain port 5 and back to the sump 9. The height of the outer coaxial water column 20 could decrease to nothing. The rate of outflow of water would be reduced if the pump is left partially on. Flow limiting means 12, which may be designed and configured to operate in just one or in both directions (or to be bypassed), can be fitted in line with the outer tube fill and drain port. Alternatively separate fill and drain ports with independent valve arrangements may be utilised.

The top of outer tube 2 is sealed with the outwardly sealed lid 4 which can protrude downwards to provide a run off for drops of condensation 17 that may form. The inner tube 3 can finish axially just short of the outer tube 2 leaving a communicating air gap 18. Support 19 to prevent movement of the inner tube 3 away from the axis can be provided for.

Inner tube 3 can be filled with water to the top and can over flow water into the volume formed between inner tube 3 and outer tube 2. Similarly the outer coaxial water column 20 could increase in height such that it spills in to the inner tube 3. The venting gap 21 allows both air and water to pass both ways (see Figure 3).

A float 22 can be loose fitted and will rest on the outer coaxial water column 20 (See Figure 3). This highlights the position towards the top of the outer coaxial water column 20. Lighting 23 is fitted below the manifold. A pressure switch 24 is fitted to protect the tubes against over pressure should it occur. An inner tube pressure transmitter 25 can be fitted to the manifold 1 at the bottom of the inner tube 3 and an outer tube pressure transmitter 26 can be fitted to the manifold 1 at the bottom of the outer tube 2. These allow a feedback control system for the levels of water in the inner tube 3 and the outer coaxial water column 20.

The invention is controlled with electronic control means 27 and electronic timing means 28 which can have inputs from the pressure switch 24, the inner tube pressure transmitter 25 and the outer tube pressure transmitter 26. The inner tube fill pump 8, the outer tube fill pump 15, the inner tube drain bypass valve 14 and the lighting 23 are controlled and actuated by the electronic control means 27, which is linked to, and can be integral with, the electronic timing means 28 (See Figure 2).

The action of the clock according to this first embodiment is now described.

The level of the vortex of water 10 in the inner tube 3 indicates the minutes in an hour. Just after the start of a new hour period, the inner tube fill pump 8 starts to ramp up in speed and supplies water to the inner tube tangential fill port 6. The flowrate of water through the inner tube tangential fill port 6 is governed by the time of the hour and programmed to increase so that the fill level of the vortex of water 10 corresponds to the minutes elapsed during the hour. The level of the vortex of water 10 will, therefore, increase from a low level (indicating the start of an hour) to a high level (indicating the end of an hour). This occurs because during the fill cycle, the speed of the inner tube fill pump 8 is increased over the hour and the delivered flowrate of water is always increasing beyond that which can flow out through the inner tube drain port 7. The air that was previously occupying the volume bounded between the inner tube 3, the manifold 1 and the outwardly sealed lid 4 is displaced by the water. Because of the formation of the vortex with the air core, this is able to pass out of the clock through the inner tube drain port 7 simultaneously with the water.

At the end of an hour, the inner tube 3 is emptied. This is achieved by reducing the rate of the inner tube fill pump below the rate at which water is flowing out of the inner tube drain port 7 and back to the sump 9. The drain rate can be increased by opening the inner tube drain bypass valve 14. In the clock, the rate of the inner tube fill pump 8 should be reduced as much as possible so that the emptying occurs quickly. It is necessary however to maintain the swirl of the vortex otherwise the flow of air through the inner tube drain port 7 can not be maintained. It is not always essential to open the inner tube drain bypass valve 14 but this can make the emptying faster. This emptying cycle can occur in approximately the first thirty seconds or minute of the next, new hour. After the emptying, if the inner tube drain bypass valve 14 had been opened, then it must be closed and the cycle repeats with the inner tube fill pump 8 being controlled to provide the correct, increasing, flowrate over the remaining portion of the new hour. This cycle repeats all the time the clock is running.

The outer coaxial water column 20, which can have an optional float 22 on top, is supplied from the outer tube fill pump 15. The flow of water to the outer tube fill and drain port is controlled both by the outer tube fill pump and the outer tube drain valve 16. If the outer tube drain valve is closed, then water will neither flow into or out of the outer coaxial column 20. If the outer tube drain valve 16 is opened and the rate of

pumping of the outer tube fill pump is sufficient to overcome the head of water in the outer coaxial water column 20, then the water level will rise. If it is less than the head of water in the outer coaxial water column 20, then the water level will fall.

In this first embodiment, it can be assumed that the water level of the outer coaxial water column 20, corresponding to the start of the new 12 hour period, is at a very low visible water level of the manifold. Therefore, the electronic control and timing means 27 and 28 will cause the outer tube fill pump 15 to ramp up in speed to a level which will just cause the water level to cause the float 22 to lift off its lowest setting by a very small amount (corresponding to the start of the new 12 hour period). The outer tube drain valve 16 will be open whilst the electronic control and timing means 27 and 28, control the outer tube fill pump 15 to achieve the correct water level. When the water level is set, the outer tube drain valve 16 will close and the outer tube fill pump 15 will be switched off for the remainder of the following hour. Just before the clock is to indicate the passing of one hour into the new 12 hour period, the outer tube fill pump 15 is ramped to a level which would cause the level of the outer coaxial water column 20 to rise towards the marking of the water level of the next hour. Once the outer tube fill pump 15 is ramped to at least the level of the current hour, the outer tube drain valve 16 is opened. The outer tube fill pump 15 can be controlled to deliver water such that the level of water in the outer coaxial water column 20 increases to the next hour in a visually attractive and repeatable way. This process continues hourly. At the end of the 12 hour cycle, the outer tube fill pump 15 is ramped down and the outer tube drain valve 16 is opened so that the water drains back to the sump 9. The 12 hour cycle repeats all the time the clock is running.

The second embodiment also uses a centrifugal type pump for the inner tube fill pump 8 but uses a dosing pump for the outer tube fill pump 15. Unlike in a centrifugal pump, water can not flow backwards through a dosing pump. This second embodiment is illustrated in Figures 4 and 5 and also takes the form of a clock. Figures 1b and 3 also apply to this embodiment.

The main construction of the clock and functioning of the inner tube 3 is the same as that described for the first embodiment and so the description is not repeated. The system describing and controlling the outer coaxial water column 20 is different and so is described hereafter.



The outer coaxial water column 20 is contained between the inner wall of the outer tube 2 and the outer wall of the inner tube 3. If water is supplied to this tube from the outer tube fill pump 15 and it is not allowed to drain away, because valve 16 is closed, then the outer coaxial water column 20 will increase in height. If the outer tube drain valve 16 is open and the filling through the outer tube fill and drain port 5 is stopped, then the volume of water will be enabled to drain through the outer tube fill and drain port 5 and back to the sump 9. The height of the outer coaxial water column 20 could decrease to nothing.

The action of the outer coaxial water column 20, in this second embodiment, clock is now described.

The outer coaxial water column 20, which can have an optional float 22 on top, is supplied from the outer tube fill pump 15. If the outer tube drain valve 16 is closed and the outer tube fill pump 15 is on, then the outer coaxial water column 20 will increase in height. The electronic control and timing means 27 and 28 ensure that, just past the start of a 12 hour cycle (12 noon or 12 midnight), the outer tube drain valve 16 is closed and the outer tube fill pump is switched on. The outer tube fill pump 15 can be controlled to deliver water such that the level of water in the volume 20 increases from a low level to a high level over 12 hours. At the end of the 12 hour cycle, the outer tube fill pump 15 is switched off, the outer tube drain valve 16 is opened and the water drains back to the sump 9. After the empty cycle, just into the start of the new 12 hour period, the outer tube drain valve 16 is closed and the outer tube fill pump 15 is switched on again. This cycle repeats all the time the clock is running.

The third embodiment uses one centrifugal type pump between both columns. It is illustrated in Figures 6 and 7 and also takes the form of a clock. Figures 1b and 3 also apply to this embodiment.

In the two previously described embodiments, two pumps are used to supply water to the clock. The inner tube fill pump 8 supplies flow to create the vortex of water 10 and the outer tube fill pump 15 (which could either be a dosing or centrifugal pump) supplies flow to the outer coaxial water column 20.

In this further embodiment now described, the inner tube fill pump 8 (which is a centrifugal type pump) is used alternately to provide a flow of water for the vortex of water 10 and the outer coaxial water column 20.

The outer tube fill pump 15 is not required. A three way divertor valve 29 is now fitted after the inner tube fill pump 8. The operation of this single-pump embodiment of the clock is now described from the start of a new 12 hour period. For this description, it is assumed that the clock is switched on, having been off (and empty), at the end of the last 12 hour period.

The three way divertor valve 29 is positioned so that the flow from the inner tube fill pump 8 is diverted to inner tube 3, via the inner tube tangential fill port 6. The level of the vortex of water 10 in the inner tube 3 indicates the minutes in an hour and will be filled and emptied as previously described in embodiments one and two.

At the end of a one hour period the inner tube fill pump will have been ramped down to a substantially low level. The outer tube drain valve 16 will be closed. The three way divertor valve 29 is now switched so that the flow from the inner tube fill pump 8 is directed into outer tube fill and drain port 5.

The inner tube fill pump 8 ramps to a speed which is sufficient to cause the level of water in the outer coaxial water column 20 to move to the next hour setting (which would be one o'clock in this illustration of the process) in an appropriate manner as described in the first embodiment.

When the outer coaxial water column 20 has reached the next appropriate hourly level, the three way divertor valve 29 is switched to divert the water flow to the inner tube 3 and the inner tube fill pump 8 is simultaneously ramped to a substantially low level corresponding to the start of the next hour. The rate of the inner tube fill pump 8 is then varied over the next hour to provide the indication of minutes.

At the end of the hour, the empty cycle of the inner tube 3 is repeated. The three way divertor valve 29 is switched to fill the outer coaxial water column 20 and the inner tube fill pump 8 is set at a level which causes the level of the outer coaxial water column to rise to the next hour level (two o'clock in this illustration).

The process continues over the rest of the twelve hour cycle, with the outer coaxial water column 20 being indexed upwards to the next hour level immediately following the turn of the hour.

When twelve o'clock has been reached (which is the end of a cycle), the outer coaxial water column 20 is emptied by opening the outer tube drain valve 16. This is opened as the time moves into the next twelve hour period. Therefore, at the start of a new twelve hour period, both the vortex of water 10 and the outer coaxial water column 20 empty. After the empty cycle, just into the start of the new 12 hour period, the outer tube drain valve 16 is closed and remains closed for the remainder of the 12 hour cycle. This cycle repeats all the time the clock is running.

A fourth embodiment of the invention is shown in Figure 8, which is a schematic side sectional view of a water feature. There is just a single inner tube 3, with no outer tube 2. The single tube sealed lid 30 prevents the escape of air or water from the top of the inner tube 3. The vortex of water 10 forms within the inner tube 3. The height of the vortex 10 can be controlled with the electronic control means 27 and the electronic timing means 28. The pressure switch 24 is connected to the manifold 1 at the bottom of the inner tube 3. The inner tube pressure transmitter 26 can also be fitted to the manifold 1 at the bottom of the inner tube 3. This embodiment may or may not be used as a timer or clock.

The inner tube 3 and the outer tube 2 can be graduated to assist with reading the time of day. This is not essential. The lighting 23 can be on all the time or switched on and off by the electronic control and timing means 27 and 28.

In the above embodiments, the vessel and further vessel for the water are shown as cylindrical tubes. Further tube configurations exist.

As a reference, Figure 9a shows a vessel as a cylindrical tube. In Figure 9b, the vessel is a convex tube. In Figure 9c, the vessel is a concave tube. In Figure 9d, the vessel is substantially spherical. In Figure 9e, the vessel is approximately tubular, its area varying along its axis. In Figure 9f the vessel is substantially elliptical. In Figure 9g, a cylindrical-tube vessel is contained within a further vessel which is substantially spherical. In Figure 9h, a cylindrical-tube vessel is contained within a further vessel

which is substantially elliptical. In Figure 9i, a cylindrical-tube vessel is contained within a further vessel which is convex.

Different combinations of vessels and further vessels can be accommodated depending upon the practicality of the design. Optional floats can be fitted on the outer coaxial water column 20 which is contained between the vessel and the further vessel.

Within the invention, means are provided to securely support the manifold. Covers can be provided to conceal the porting and plumbing arrangements. Water can flow in both directions through the inner tube tangential fill port 6. The outer tube fill and drain port 5 could become two ports, one for filling and one for emptying the outer coaxial water column 20. Separate valving could be provided for the fill and empty cycles.

In all embodiments of the invention, filters can be fitted in the supply of water to the inner tube 3 and the outer tube 2. Air filters can also be provided to prevent dust entry into the water feature system as a whole.

The water in the sump 9 can be treated to keep it clean using some or all of the following:- de-ionisation, filtration, chemicals and UV light.

The inner tube 3 and the outer tube 2 can be run separately and be sealed separately if desired. The outer tube 2 and the inner tube 3 could be separately sealed at the top. Inner tube 3 would vent through the inner tube drain port 7. Outer tube 2 would require means for air to be discharged during filling and admitted during emptying. The air for emptying could be achieved by pumping it in.

In the embodiments shown, gravity (alone) is used to cause the water to fall back to the sump. A separate pump, which could be an ejector pump, could be provided. And an air over pressure could be applied to increase the drain rate.

The drain tube system comprising 7, 11, 14 can be simplified. The inner tube drain bypass valve 14 is not essential.

The inner tube tangential fill port 6 can be optimised. It may take the form of several smaller inlets rather than one larger single inlet.

The outwardly sealed lid 4 and the single tube sealed lid 30 can be made removable from the outer tube 3 and inner tube 2, as appropriate, but can be sealed, for example, with an O ring or silicone.

If it is desired not to fully fill the inner tube 3 containing the vortex of water 10 then the outwardly sealed lid 4 and the single tube sealed lid 30 can have a cone-like section protruding downwards allowing any condensation droplets to run off.

The three way divertor valve 28 can be replaced with two independent on/off flow control valves.

Electronic control and timing means can be provided to detect power cuts (short or long term) and the water levels in both columns can be restored.

It is to be understood that any suitable liquid can be used in place of water if desired.

### List of Reference Numerals

1	Manifold
2	Outer tube
3	Inner tube
4	Outwardly sealed lid
5	Outer tube fill and drain port
6	Inner tube tangential fill port
7	Inner tube drain port
8	Inner tube fill pump
9	Sump
10	Vortex of water
11	Controlling tube
12	Flow limiting means
13	Secondary inner tube drain pipe
14	Inner tube drain bypass valve
15	Outer tube fill pump
16	Outer tube drain valve
17	Condensation
18	Communicating air gap
19	Inner tube support
20	Outer coaxial water column
21	Venting (gap) between outer tube and inner tube 3
22	Float
23	Lighting
24	Pressure switch
25	Inner tube pressure transmitter
26	Outer tube pressure transmitter
27	Electronic control means
28	Electronic Timing means
29	Three way divertor valve
30	Single tube sealed lid
31	Vessel
32	Further vessel

## Claims

1. A water feature, comprising a vessel containing a volume of water and means for imparting rotational motion thereto, wherein means are also provided for varying the height of the volume of water in the vessel.
2. A water feature as claimed in claim 1, wherein the vessel has a water inlet, a water outlet and means for controlling the rate of water inlet in comparison to the rate of water outlet.
3. A water feature as claimed in claim 1 or 2, wherein timing means are provided in association with the means for varying the height of the volume of water, so that the height of the volume of water varies with time.
4. A water feature as claimed in claim 3, wherein the timing means are adapted to increase the height of the volume of water over a predetermined period of time.
5. A water feature as claimed in claim 4, wherein the predetermined period of time is one hour.
6. A water feature as claimed in claim 2 or any claim dependent thereon, wherein the water inlet and water outlet are each connected to a sump and the sump has a vent to allow air travelling along the water outlet to be vented in preference to entering the water inlet.
7. A water feature as claimed in claim 6, wherein the water inlet is connected to the sump at or adjacent a base thereof.
8. A water feature as claimed in claim 6 or 7, wherein the water outlet is connected to the sump at or adjacent an upper area thereof.
9. A water feature as claimed in claim 2 or any claim dependent thereon, wherein the water inlet is arranged tangentially to the vessel at the base thereof.
10. A water feature as claimed in claim 9, wherein the water outlet is arranged centrally in the base of the vessel.
11. A water feature as claimed in any one of the preceding claims, wherein an airtight lid is provided on the upper end of the vessel to prevent water overflow therefrom.

12. A water feature as claimed in any preceding claim, wherein the vessel has a circular cross-section tube.
13. A water feature as claimed in claim 12, wherein the vessel is a convex tube.
14. A water feature as claimed in claim 12, wherein the vessel is a concave tube.
15. A water feature as claimed in claim 12, wherein the vessel is substantially spherical.
16. A water feature as claimed in claim 12, wherein the vessel is substantially elliptical.
17. A water feature as claimed in any one of the preceding claims, wherein a further vessel is provided in which a further volume of water is contained.
18. A water feature as claimed in claim 17, wherein the further vessel is arranged coaxially with the vessel.
19. A water feature as claimed in claim 18, wherein the further vessel surrounds the vessel.
20. A water feature as claimed in any one of claims 17 to 19, wherein the further vessel has a circular cross section.
21. A water feature as claimed in claim 20, wherein the further vessel is a convex tube.
22. A water feature as claimed in claim 20, wherein the further vessel is a concave tube.
23. A water feature as claimed in claim 20, wherein the further vessel is substantially spherical.
24. A water feature as claimed in claim 20, wherein the further vessel is substantially elliptical.
25. A water feature as claimed in any one of claims 17 to 24, wherein a float is provided in the further vessel.
26. A water feature as claimed in any one of claims 17 to 26, wherein means are provided for varying the height of the further volume of water.



27. A water feature as claimed in claim 26, wherein timing means are provided in association with the means for varying the height of the further volume of water, so that the height of the further volume of water varies with time.
28. A water feature as claimed in claim 27, wherein the timing means are adapted to increase the height of the further volume of water over a predetermined period of time.
29. A water feature as claimed in claim 28, wherein the predetermined period of time is twelve hours.
30. A water feature as claimed in any one of claims 17 to 29, wherein an airtight lid is provided on the upper end of the further vessel to prevent water overflow therefrom.
31. A water feature as claimed in claims 11 and 30, wherein the airtight lids are integral with one another.
32. A water feature as claimed in claim 31, wherein an overflow passage is provided between the vessel and the further vessel at or near the upper ends thereof.
33. A water feature as claimed is any one of claims 17 to 32, wherein a single pump is provided for selectively introducing water either to the vessel or to the further vessel.
34. A water feature as claimed in any one of the preceding claims, wherein the water feature is a clock.
35. A water feature as claimed in any one of the preceding claims, wherein lighting means are provided so as to illuminate the volume of water.
36. A water feature substantially as herein described with reference to any one of the embodiments shown in the accompanying drawings.
37. A method of operating a water feature comprising at least one vessel containing a volume of water, comprising the steps of:
  - (a) causing the or a volume of water to rotate about an axis thereof so as to form a vortex therein; and
  - (b) causing the rotating volume of water to vary in height over time.

38. A method as claimed in claim 37, wherein the rotating volume of water varies in height in such a way as to provide, by its height, an indication of time.
39. A method as claimed in claim 38, wherein the height of the rotating volume of water increases from a minimum to a maximum over a period of 60 minutes.
40. A method as claimed in claim 38 or 39, wherein the height of the rotating volume of water increases from a minimum to a maximum at a substantially constant rate.
41. A method as claimed in any one of claims 37 to 40, wherein water is introduced to and drained from the vessel containing the rotating volume of water as the height thereof is varied.
42. A method as claimed in claim 41, wherein, as the height of the rotating volume of water is decreased, the rate of introduction of water is less than the rate of draining.
43. A method as claimed in claim 41 or 42, wherein, as the height of the rotating volume of water is increased, the rate of introduction of water is greater than the rate of draining.
44. A method as claimed in any one of claims 41 to 43, wherein, as the height of the rotating volume of water is decreased, air is introduced into the vessel via a port through which water is drained from the vessel simultaneously with the said draining.
45. A method as claimed in any one of claims 41 to 44, wherein, as the height of the rotating volume of water is increased, air is vented from the vessel via a port through which water is drained from the vessel simultaneously with the said draining.
46. A method as claimed in any one of claims 37 to 45, wherein the water feature comprises a second vessel containing a second volume of water and the height of the second volume of water is varied over time.
47. A method as claimed in claim 46, wherein the height of the second volume of water is increased from a minimum to a maximum over a predetermined period of time.
48. A method as claimed in claim 47, wherein the height of the second volume of water increases from the minimum to the maximum at a substantially constant rate.

49. A method as claimed in claim 46, wherein the height of the second volume of water increases from the minimum to the maximum in discrete steps.
50. A method as claimed in any one of claims 47 to 49, wherein the predetermined period of time is twelve hours.
51. A method as claimed in claims 49 and 50, wherein the number of discrete steps is twelve.
52. A method of operating a water feature substantially as herein before described with reference to any one of the embodiments shown in the accompanying drawings.

**Abstract****Water Feature**

The invention provides a water feature comprising a vessel containing a volume of water and means for imparting rotational motion thereto, wherein means are also provided for varying the height of the volume of water in the vessel. The invention also provides a method of operating a water feature comprising at least one vessel containing a volume of water, comprising the steps of causing the or a volume of water to rotate about an axis thereof so as to form a vortex therein and causing the rotating volume of water to vary in height over time.

Figure 1a

Figure 1a



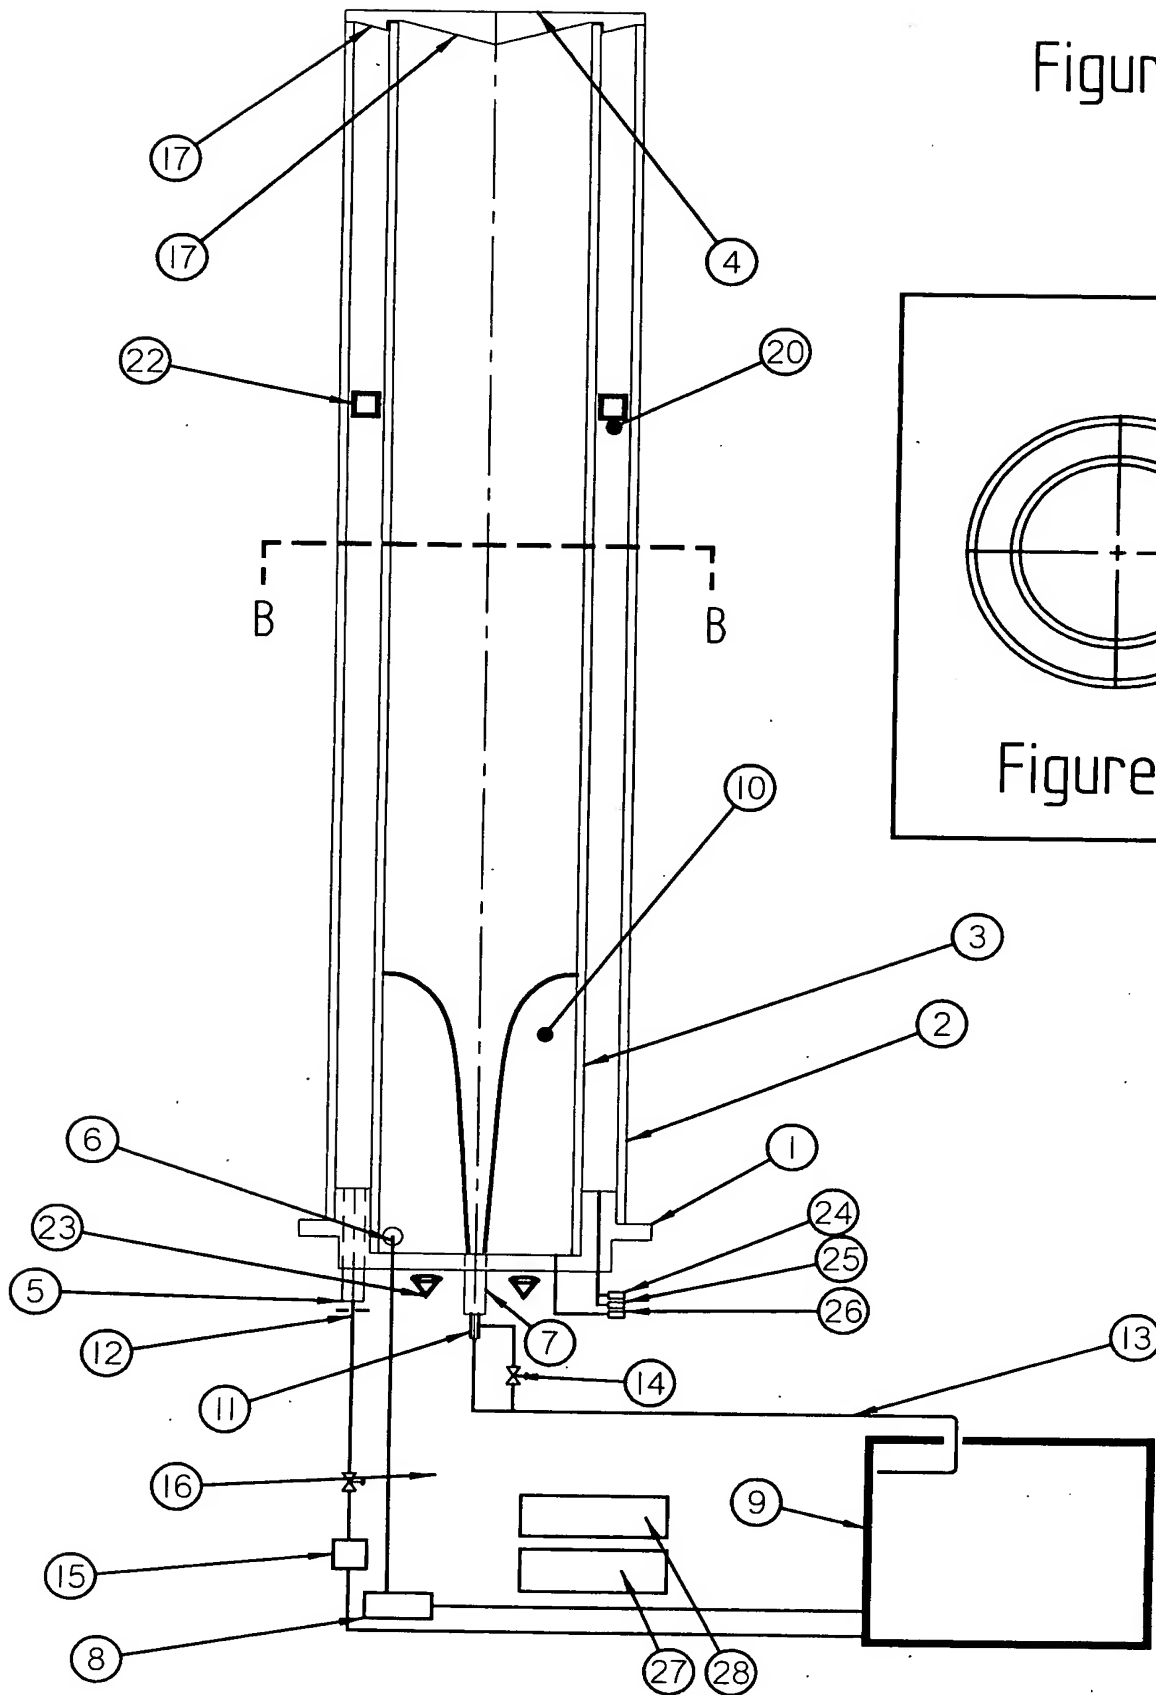


Figure 1b

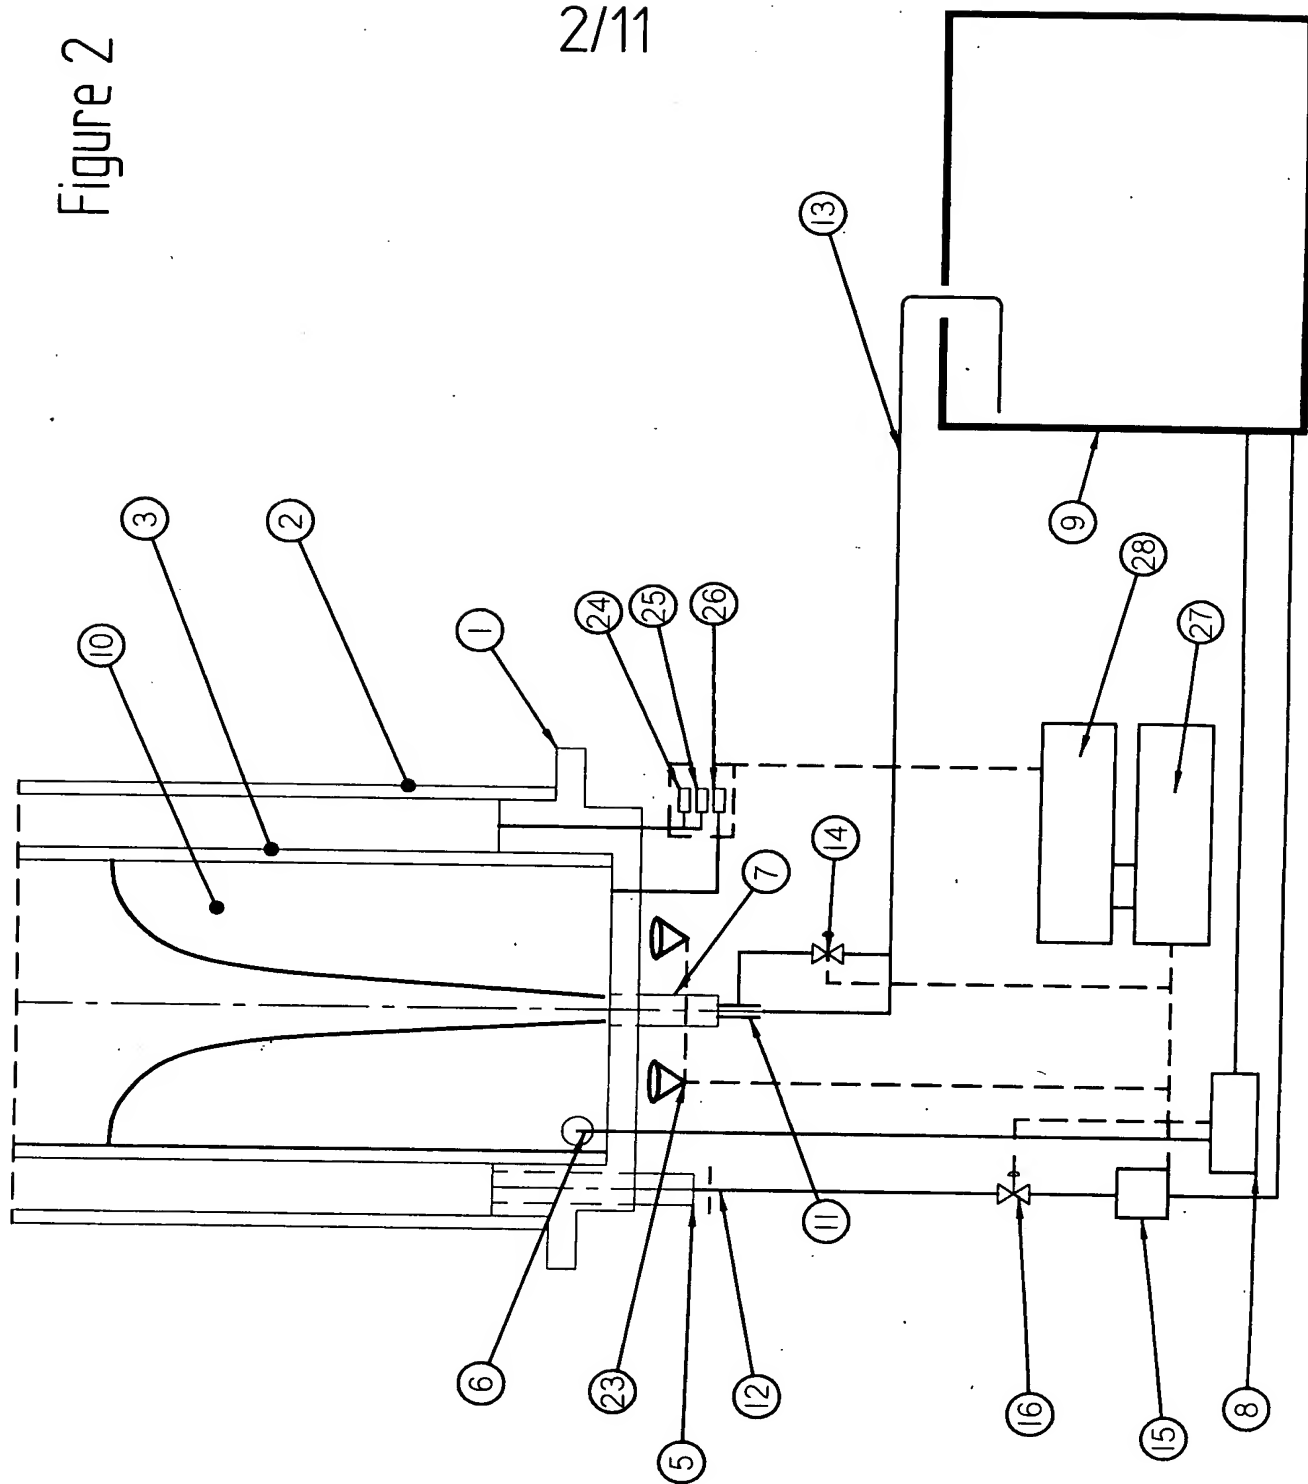

3\11

Figure 3

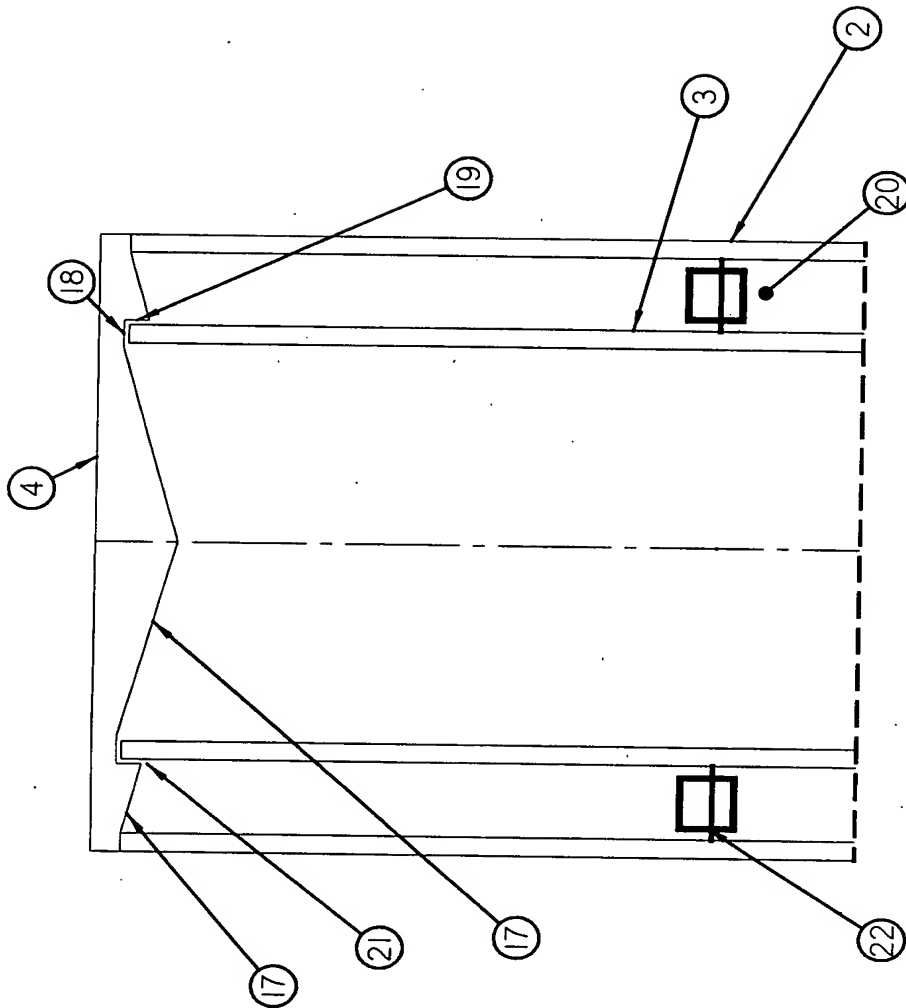

4/11

Figure 4

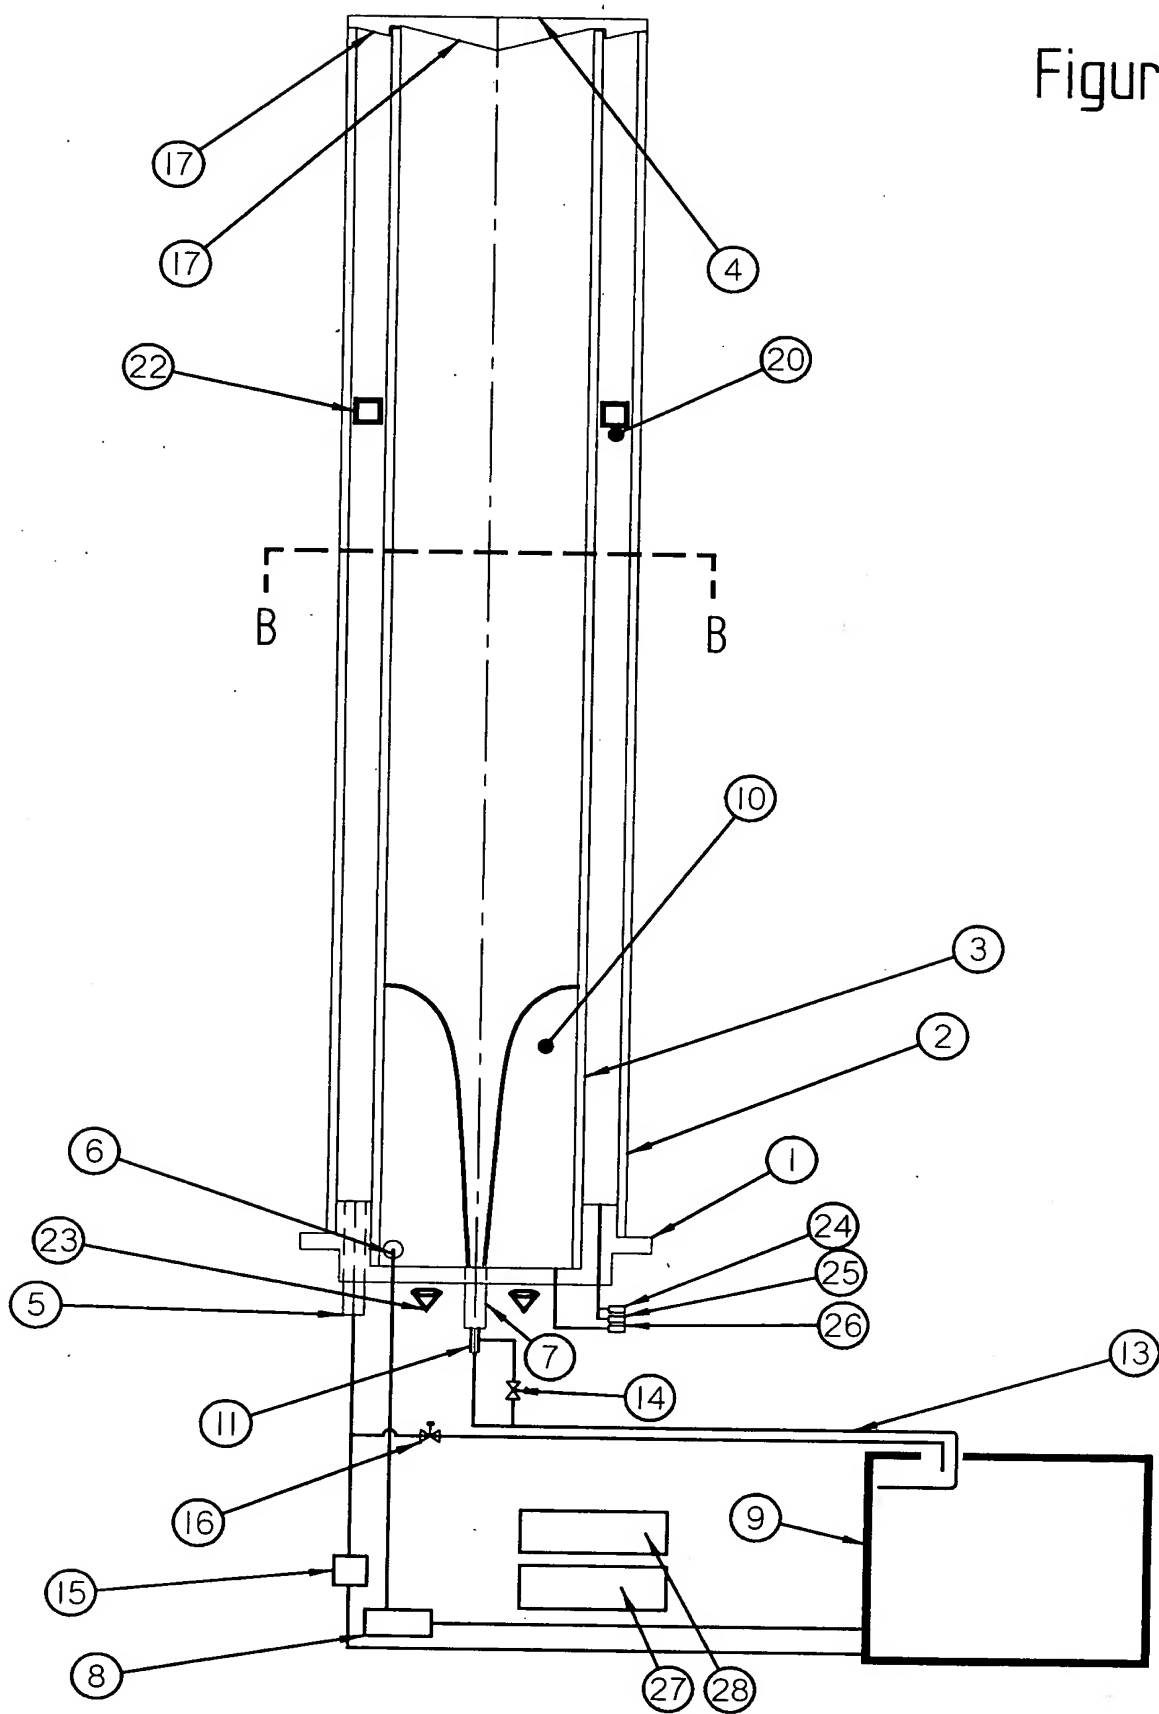




Figure 5


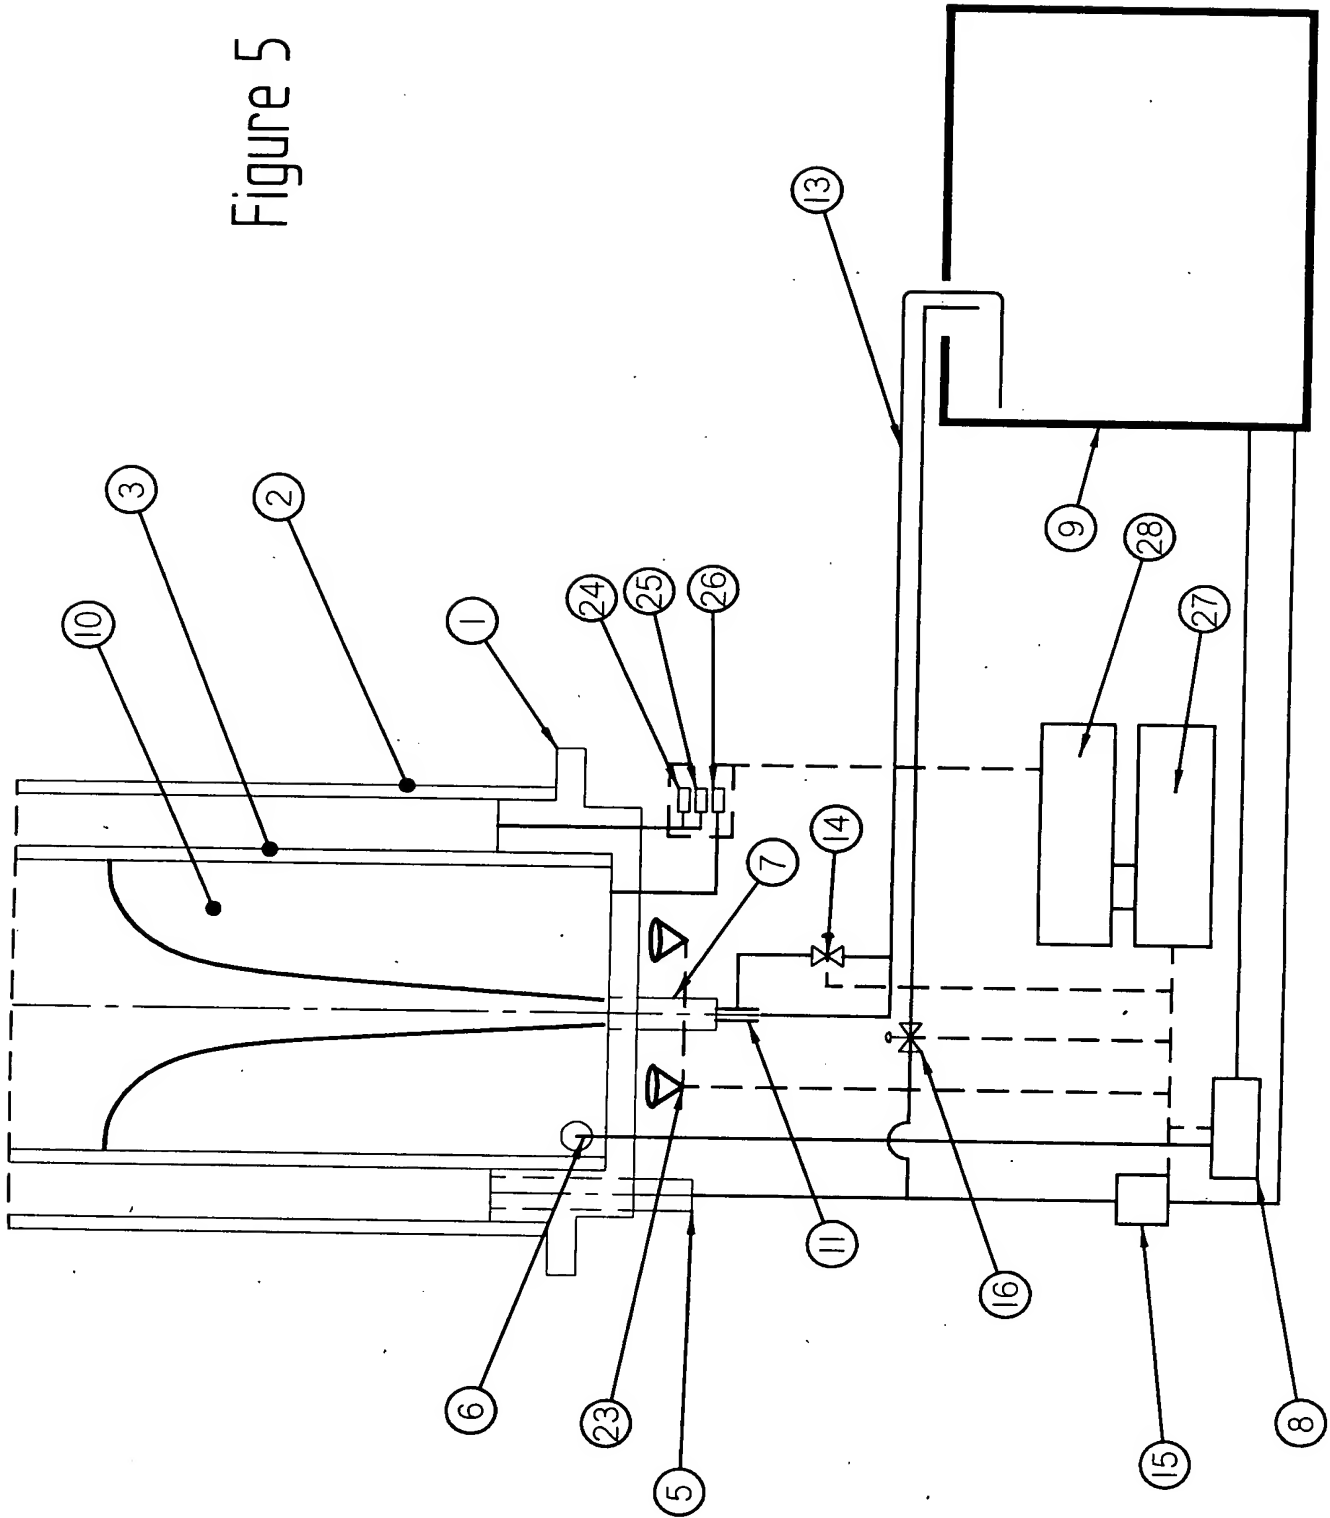


Figure 6


7/11

Figure 7

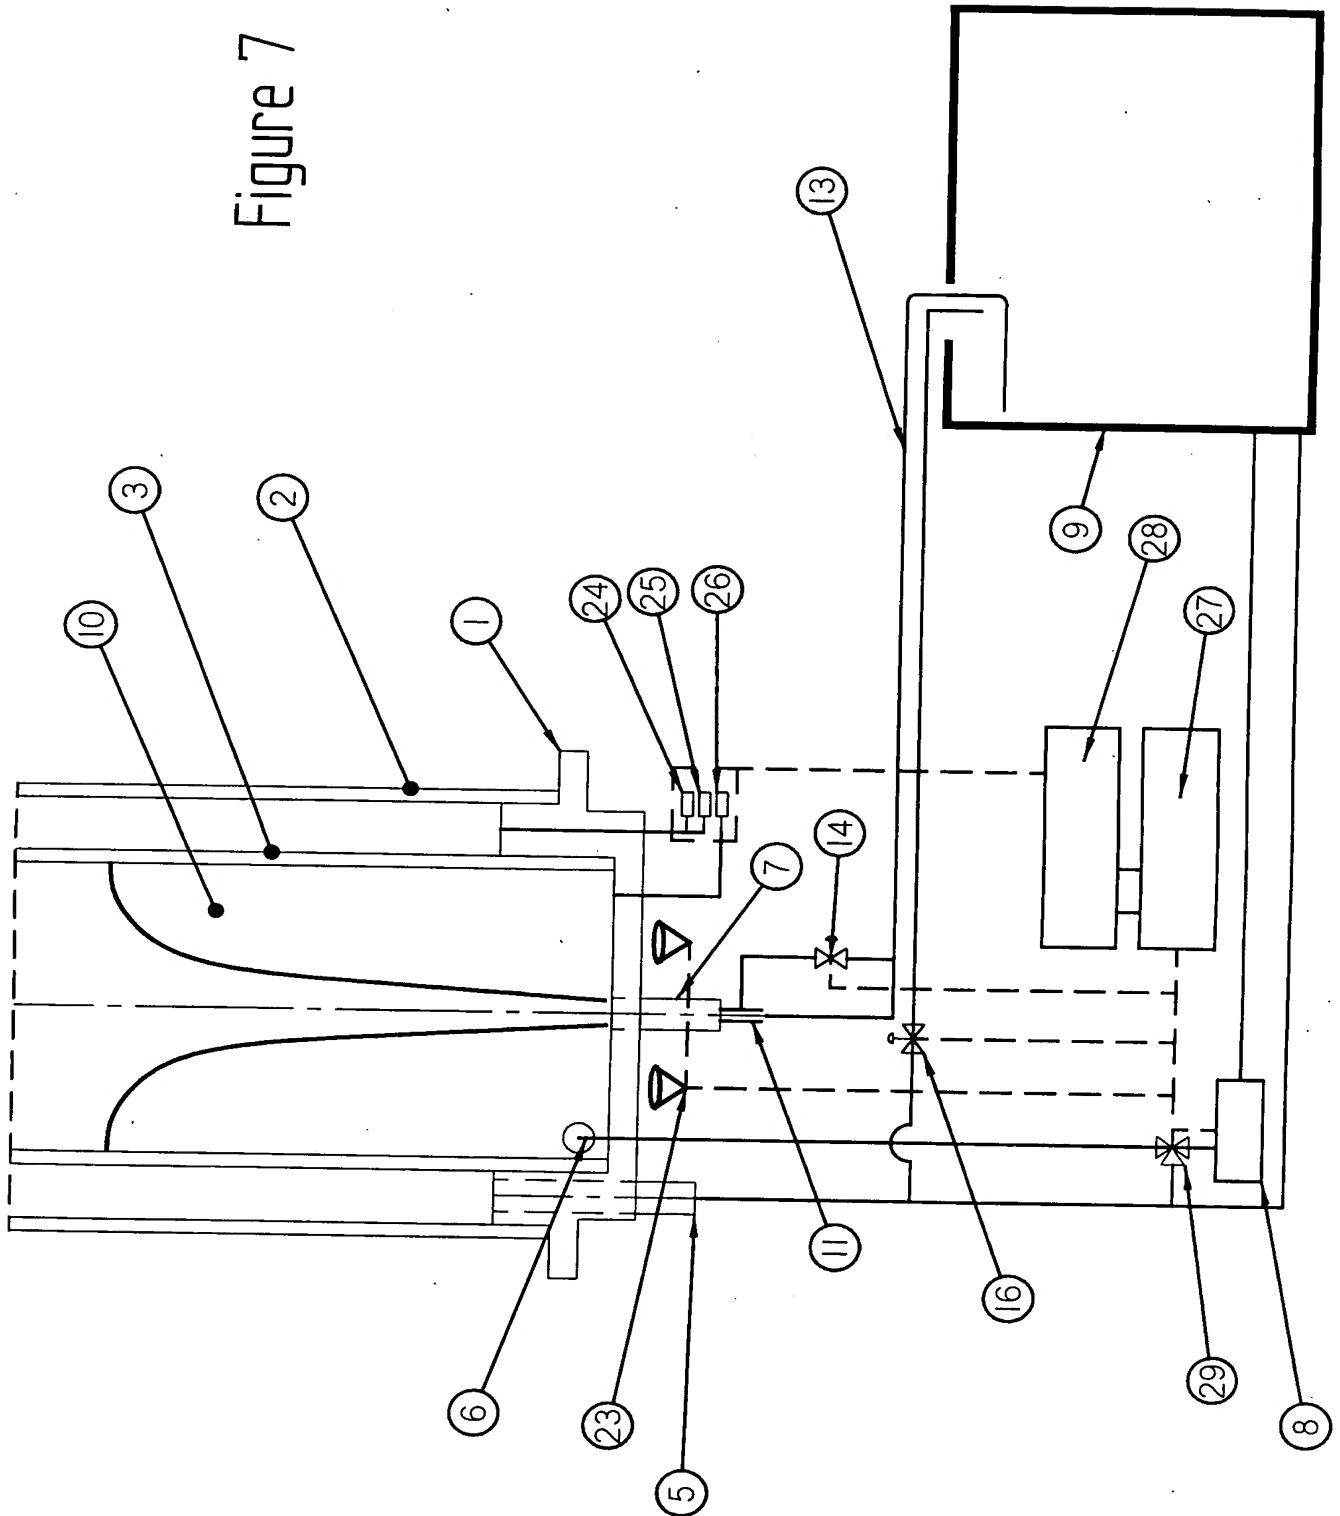

8/11

Figure 8

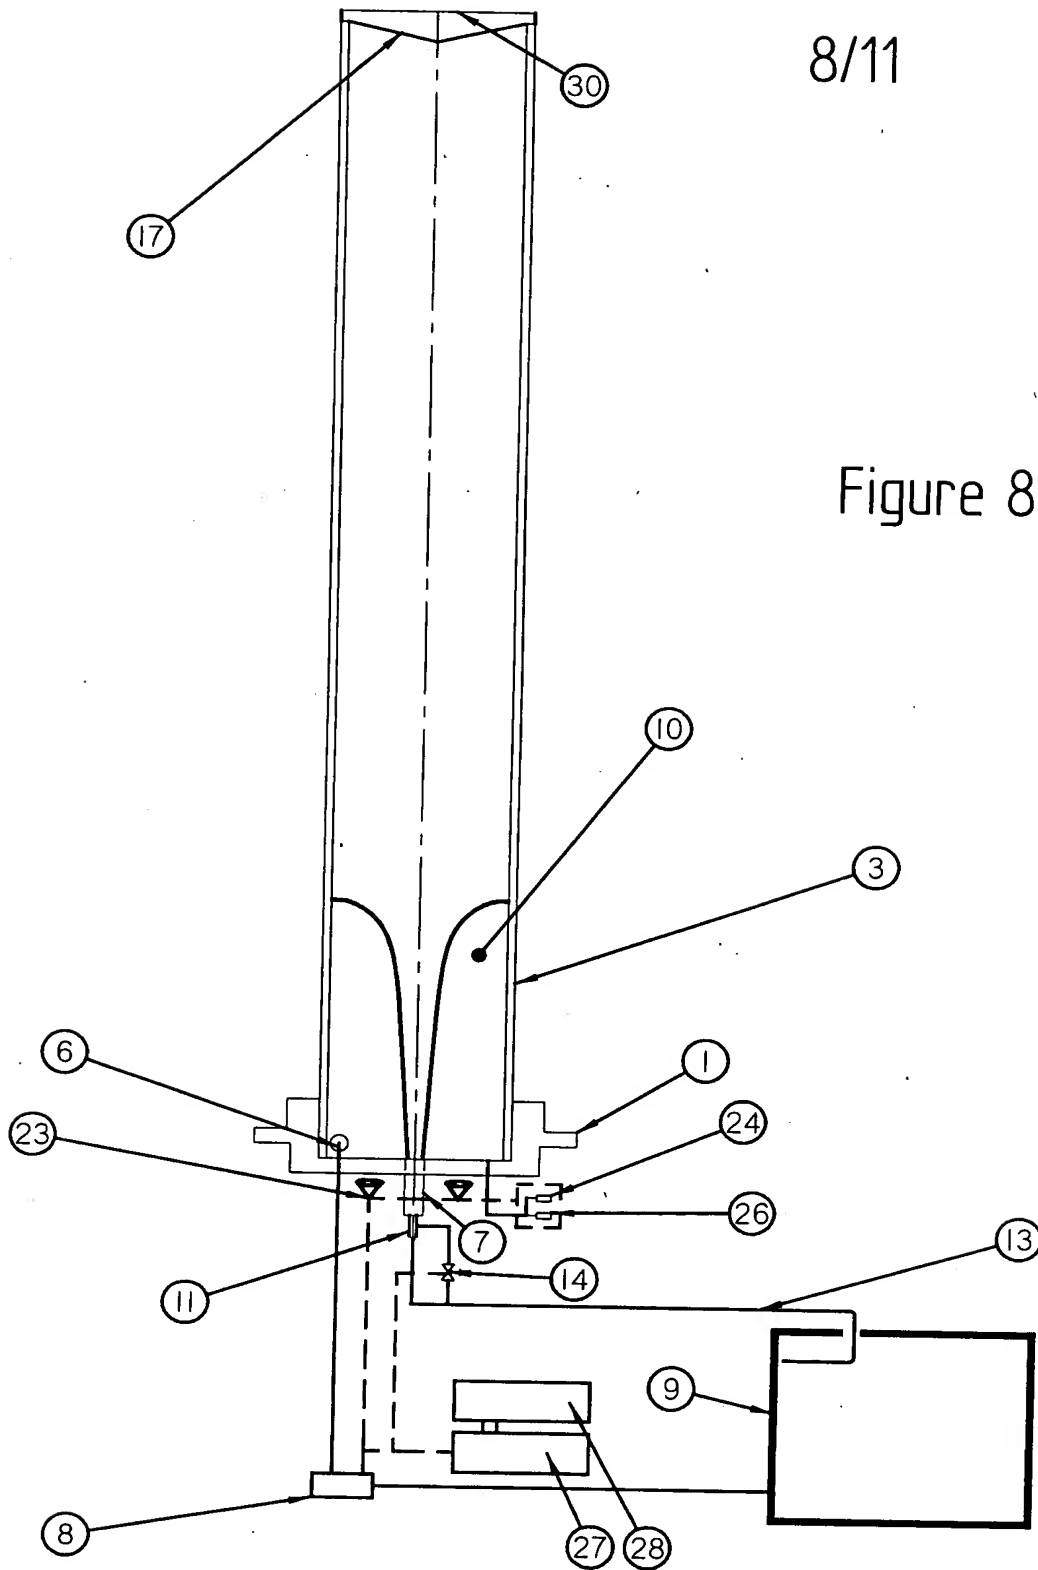

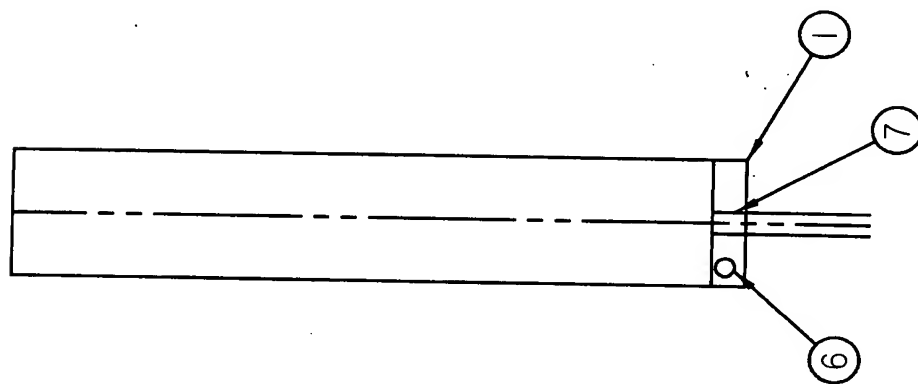


Figure 9a

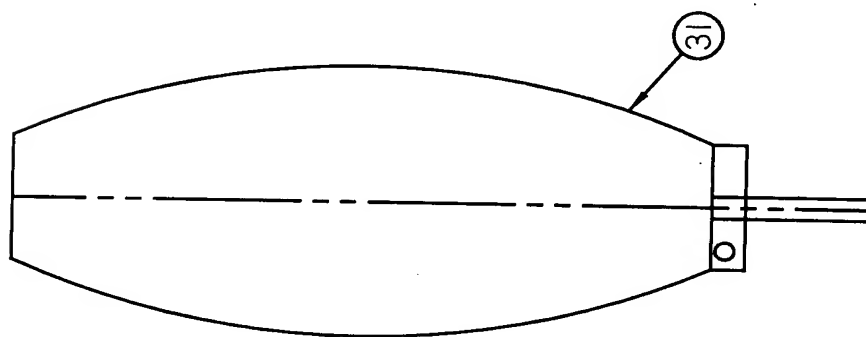


Figure 9b

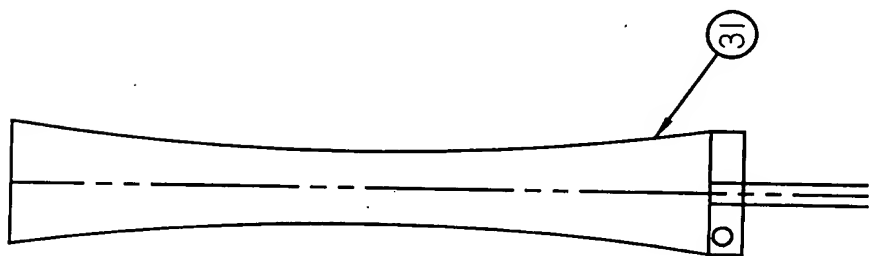


Figure 9c

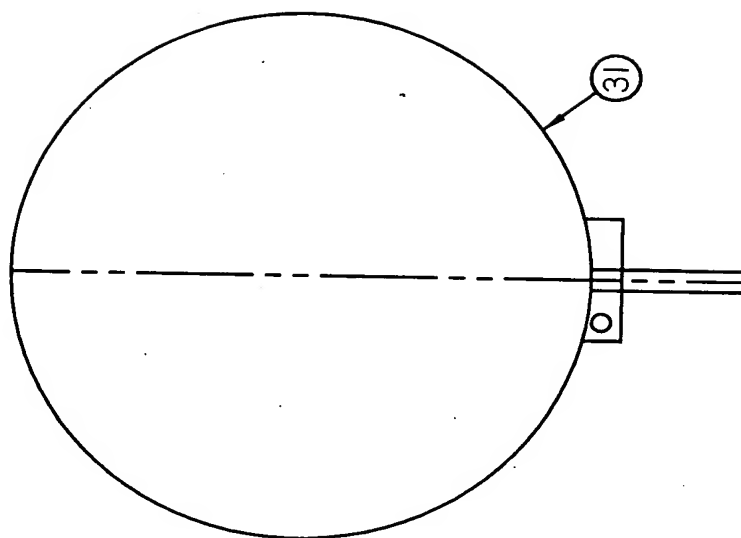


Figure 9d

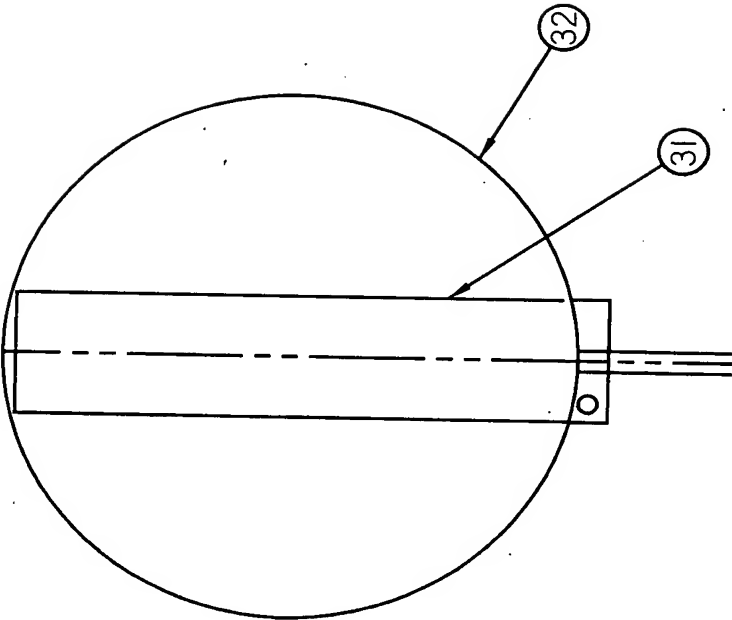


Figure 9g

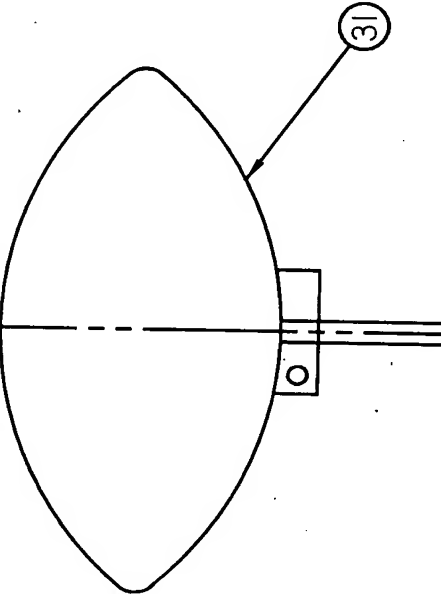


Figure 9f

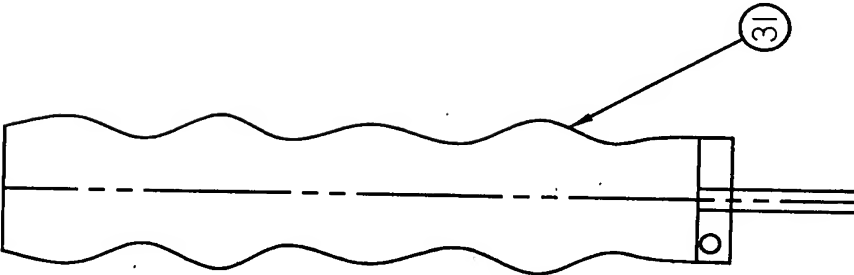


Figure 9e

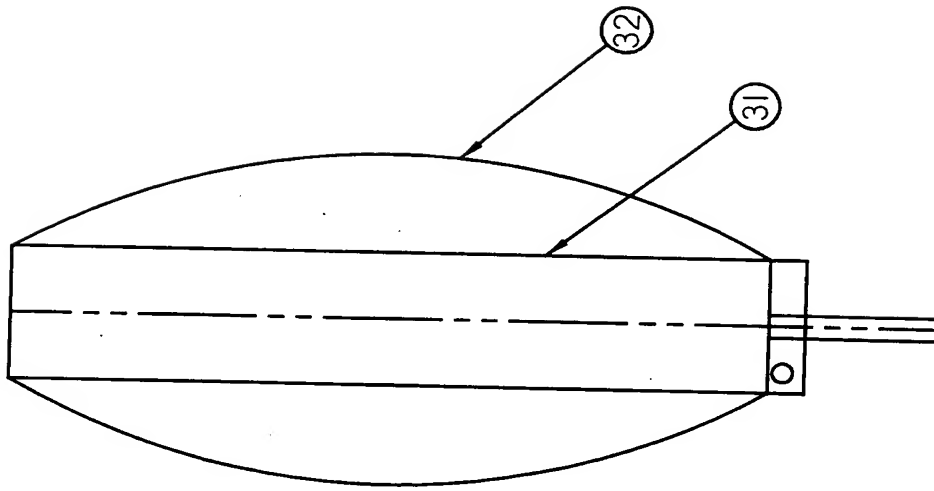


Figure 9i

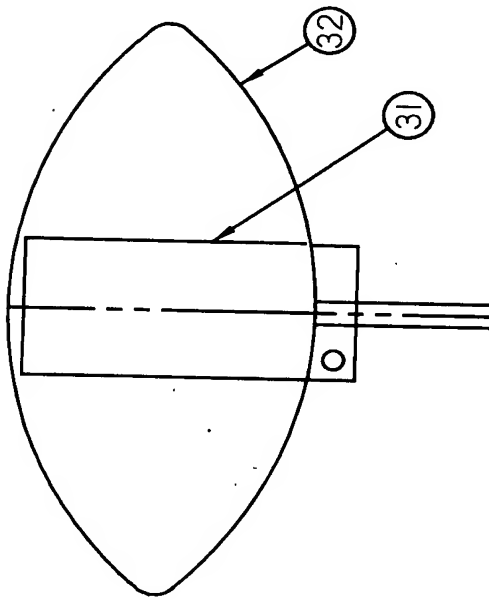


Figure 9h